

JAKA®

www.jakarobotics.com | 🔍

Shanghai JAKA Robotics Ltd

- 📍 JAKA Shanghai: Building 33-35, No. 610 Jianchuan Rd, Minhang District, Shanghai, China
- 📍 JAKA Changzhou: Building 10, No.377 South Wuyi Rd, Changzhou, Jiangsu, China
- 📍 JAKA Shenzhen: Room 501, Building 7, Taihua Wutong Industrial Park, Baoan District, Shenzhen, China
- ✉ marketing@jakarobotics.com

☎ 400-006-2665



JAKA official account



JAKA OTA mini program

Copyright © 2022 JAKA. All rights reserved.

Disclaimers:

The copyright belongs to JAKA and cannot be copied or reproduced in any form without written permission.

The company reserves the right to interpret and update the contents of the materials without notice.

JAKA®

Just Always Keep Amazing

Global Leader in Flexible Intelligent Robots



PRODUCT SELECTION GUIDE



No Teaching Pendant

Teaching JAKA collaborative robots is easy with JAKA APP, removing the need for traditional teaching pendants. The APP is available on tablets, smartphones and PCs.



Wireless Connection

With wireless connection it is easy to communicate and assign tasks to a cobot. No more wires attached! Enjoy a clean and safe space with JAKA cobots.



Safe Human-robot Collaboration

JAKA cobots are designed to work safely with humans – no need for a safety fence – thanks to collision detection, enabled by a built-in torque feedback module. Users may choose even the lightest of bumps to cause the cobot to stop, to avoid harm.



Graphic Programming

On any graphical device – PC, tablet or phone. The intuitive graphic programming software requires no prior programming experience. Anyone can set and adjust positions and tasks with ease.



Drag Teaching

Users and integrators can use drag teaching to deploy a cobot in just a few minutes. Simply move the cobot to any position, and it will memorize it instantly.



Plug-and-play

A few minutes is all it takes to install JAKA cobots. Whether on a horizontal surface or vertical, cobots can be easily mounted and ready to go. Flexible and light, cobots are compatible with numerous grippers and end effectors. All these make JAKA cobots truly plug-and-play, allowing users to deploy and re-deploy in any production environments.





Product Matrix



Ease of Use


Security

Reliability

Compatibility

Flexible • Intelligent

Covering a variety of industries,
meeting the needs of different application scenarios

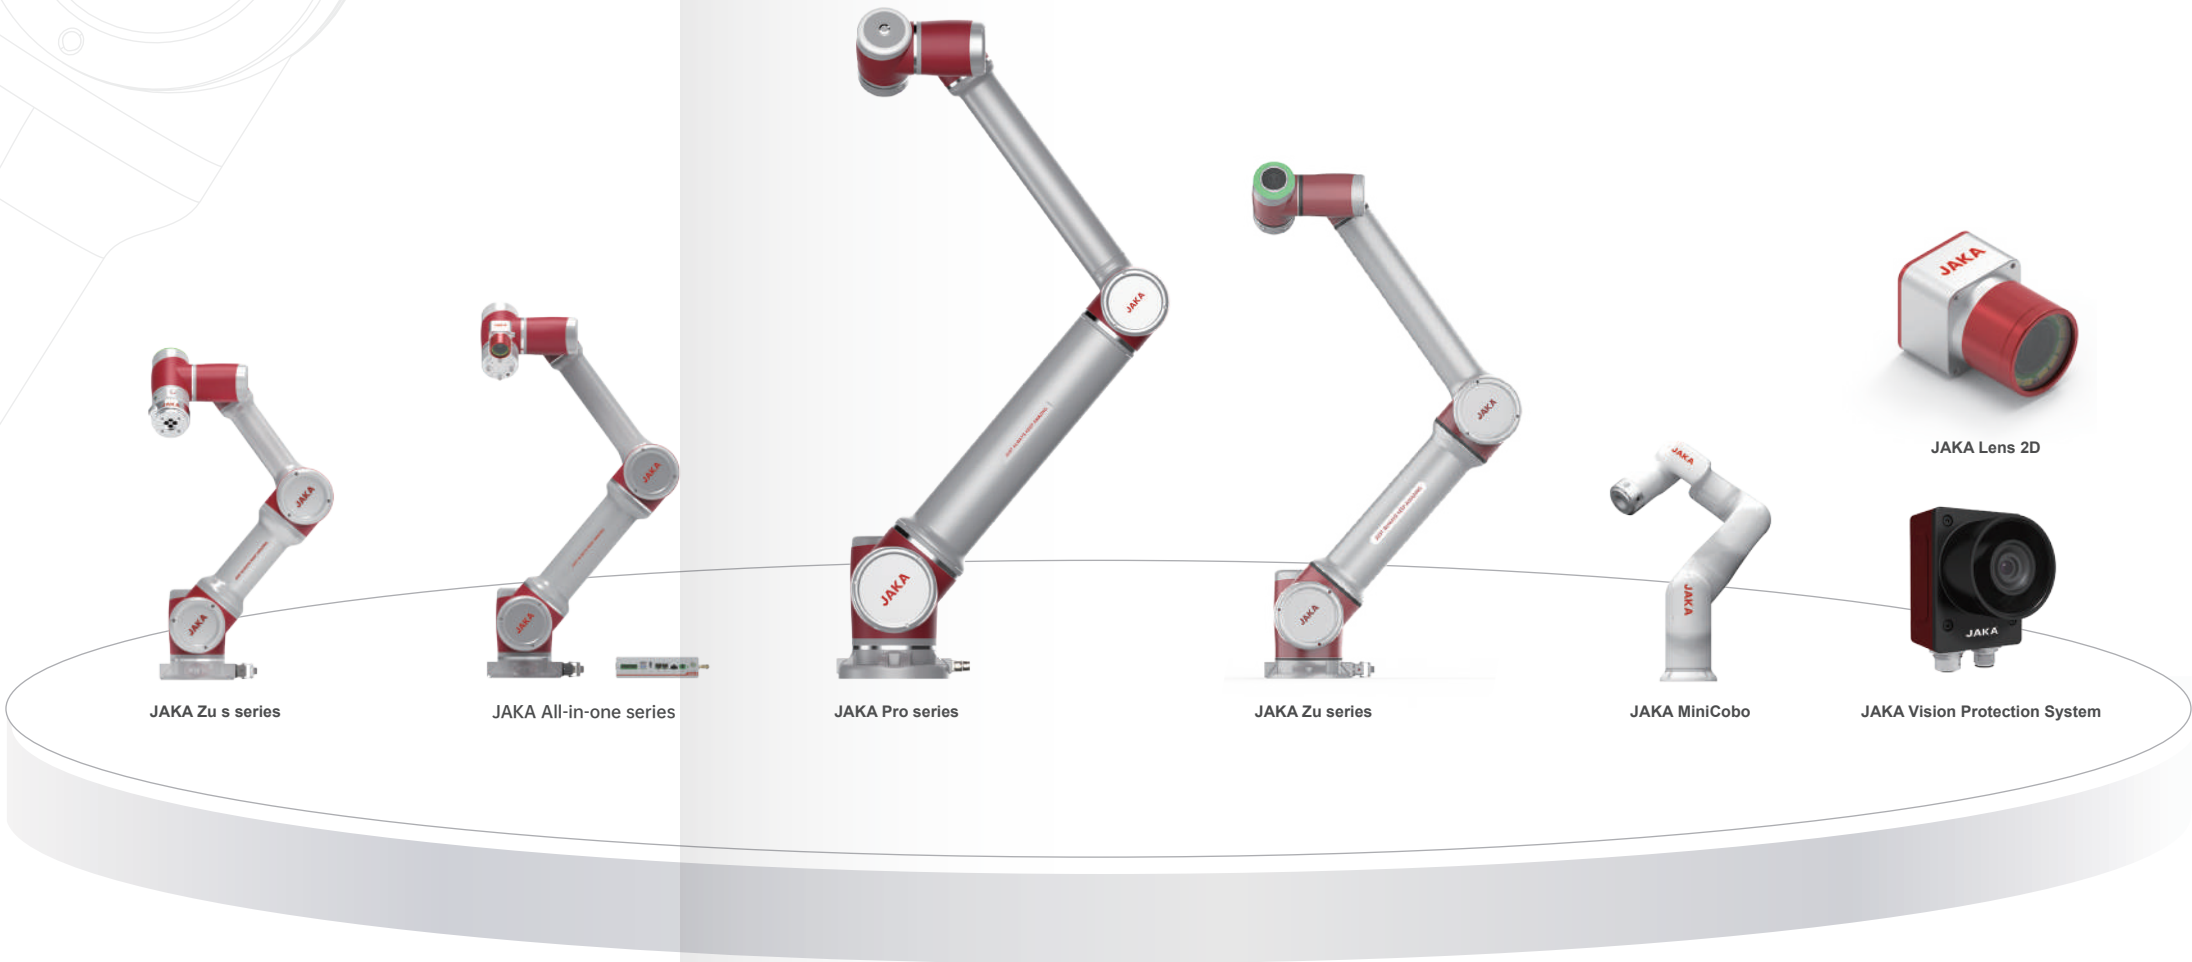

Suitable for a Large Range of Industries

Meet the needs of different application scenarios

JAKA Zu Collaborative Robots



Excellent flexibility and accuracy

- » Better Versatility and Flexibility
It is easy to deploy, program or re-program JAKA Zu cobots. The number of applications is unlimited
- » Great Performance
Cobots provide outstanding results thanks to repeatability of ± 0.02 mm and accuracy of ± 0.05 mm
- » Applicable Industries
Automotive and auto parts, 3C electronics, advanced manufacturing, food and beverage, logistics, and more
- » Recommended Applications
Palletizing, packaging, pick and place, assembly, machine tending



JAKA Zu s Collaborative Robots



Integrated force sensor and force control

Each JAKA Zu s cobot is equipped with an industrial force sensor and force control module which is easy to configure, debug, and program



- » Enhanced Interactivity
Force sensor allows cobots to feel the objects and environment it comes into contact with
- » Ease of Use
Simple configuration of force control through app with real-time force value display
- » Better Precision
Several force control modes available, ensuring constant force accuracy
- » Greater Safety
Full-arm collision detection and self-learning monitoring provide safe collaboration of cobot with humans and equipment
- » Applicable Industries
Automotive and auto parts, 3C electronics, advanced manufacturing, packaging, metal and machining, and more
- » Recommended Applications
Polishing, sanding, grinding, inspection, testing, palletizing, and more



Flexible and intelligent

Each cobot has its own strengths

JAKA Pro Collaborative Robots

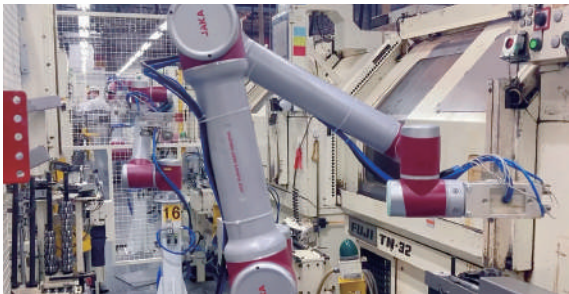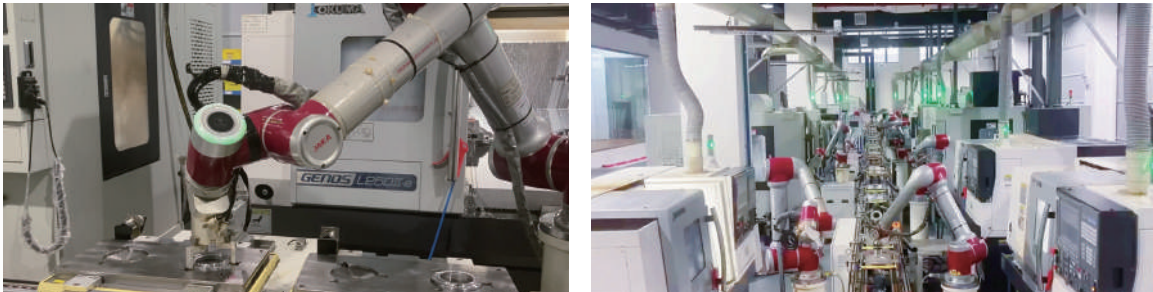

Higher protection and reliability

Designed to operate in industrial application scenarios with high protection level requirements

- » Excellence in Harsh Environments
Each JAKA Pro cobot possess IP68 protection level, making them immune to dust and water in the environment, and are fully functional at temperatures ranging from -10°C to 50°C
- » Greater Performance
With repeatability of ± 0.02 mm cobots handle tasks precisely for up to 50,000 hours non-stop
- » Applicable Industries
Automotive and auto parts, 3C electronics, food and beverage, agriculture, metal and machining, and more
- » Recommended Applications
Painting, coating, spraying, CNC machine tending, welding, cutting, milling, grinding, and more



Suitable for a Large Range of Industries

Meet the needs of different application scenarios

JAKA All-in-one Collaborative Robots



Created to see what the human eye is not able to see

»» Excellent Vision

JAKA All-in-one cobots are equipped with JAKA 2D Lens, accurately identifying very small differences, be it position, color or shape, in key components, 24/7

»» Ease of Deployment

Thanks to a small controller, wireless connection, and IO connection, deployments of JAKA All-in-one cobots easy and fast

»» Applicable Industries

Automotive and auto parts, advanced manufacturing, 3C electronics, logistics, medical devices, and more


»» Recommended Applications

Assembly, inspection, testing, packaging, palletizing, pick and place, sorting, and many more

Flexible and intelligent

Each cobot has its own strengths

JAKA MiniCobo

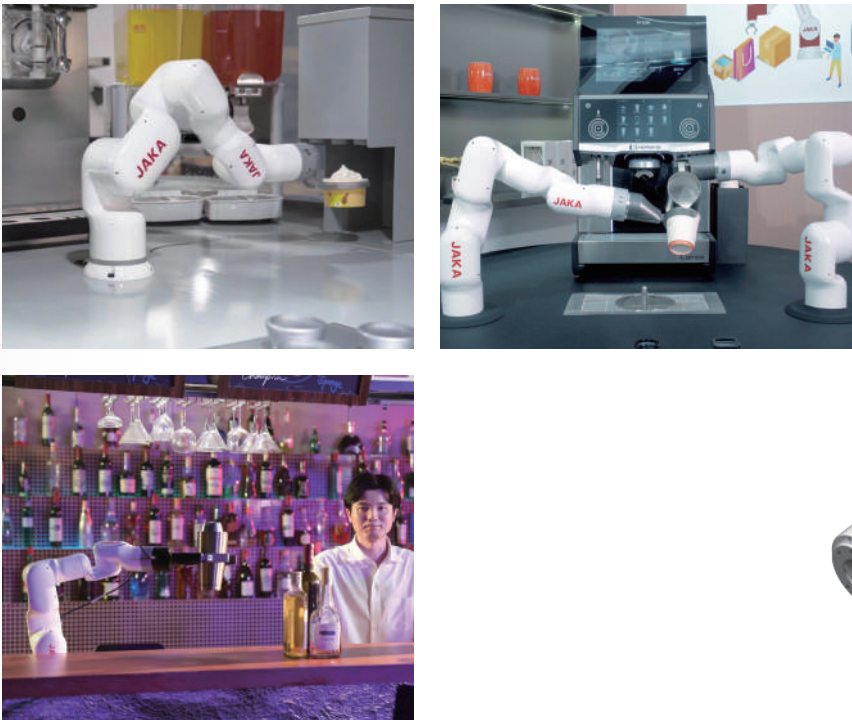

A cost-effective cobot for B2C businesses

»» Ease of Programming

Anyone, with or without prior experience of programming, can effectively assign a task thanks to drag teaching and intuitive graphic programming APP

»» Smaller Footprint

This elegant cobot arm can be installed anywhere on a working space, be it a desktop or coffee station

»» Greater Versatility

JAKA MiniCobo can be easily re-programmed to provide users with more choices in different application scenarios

»» Best Industries

Food and beverage, education, entertainment

»» Recommended Applications

Pick and place, order picking, sorting, and many more

JAKA Zu Collaborative Robots

Ease of Integration


- Plug-and-play
- Simple deployment
- Small footprint

Ease of Use

- In-built torque feedback module
- Drag teaching
- Graphic programming


High Precision

- Excellent repeatability
- Great accuracy
- MTBF 50,000 hours

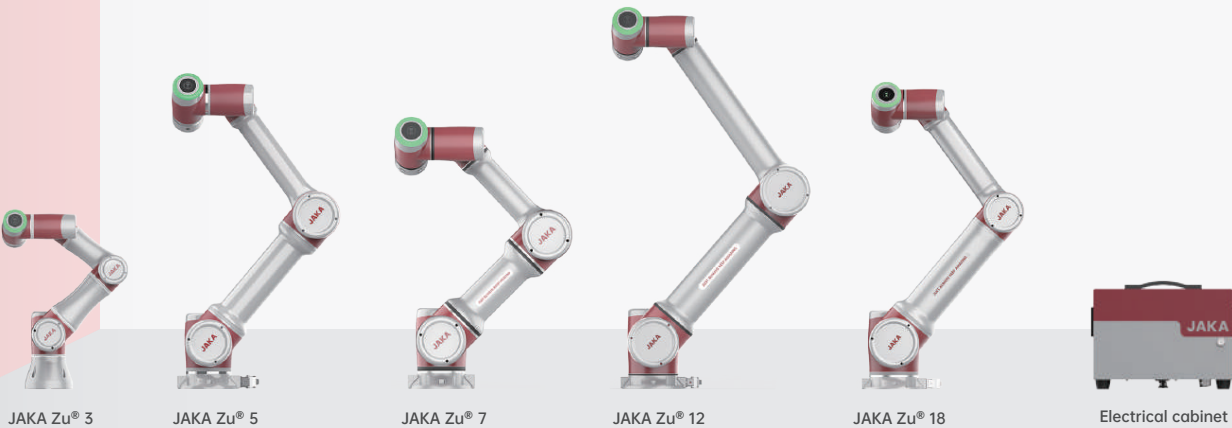


Product features	Product parameters	JAKA Zu® 3		JAKA Zu® 5		JAKA Zu® 7		JAKA Zu® 12		JAKA Zu® 18	
	Maximum payload	3kg		5kg		7kg		12kg		18kg	
	Weight	12kg		23kg		22kg		41kg		35kg	
	Working radius	626mm		954mm		819mm		1327mm		1073mm	
	Repeatability	±0.02mm		±0.02mm		±0.02mm		±0.03mm		±0.03mm	
	Number of axis	6		6		6		6		6	
	Programming	Drag teaching and graphic programming		Drag teaching and graphic programming		Drag teaching and graphic programming		Drag teaching and graphic programming		Drag teaching and graphic programming	
Teaching pendant	PC, mobile (PAD/mobile)		PC, mobile (PAD/mobile)		PC, mobile (PAD/mobile)		PC, mobile (PAD/mobile)		PC, mobile (PAD/mobile)		
Working range and speed	Robot joint	Working range	Maximum speed	Working range	Maximum speed	Working range	Maximum speed	Working range	Maximum speed	Working range	Maximum speed
	Joint 1	±360°	180°/s	±360°	180°/s	±360°	180°/s	±360°	120°/s	±360°	120°/s
	Joint 2	-85°, +265°	180°/s	-85°, +265°	180°/s	-85°, +265°	180°/s	-85°, +265°	120°/s	-85°, +265°	120°/s
	Joint 3	±175°	180°/s	±175°	180°/s	±175°	180°/s	±175°	120°/s	±175°	180°/s
	Joint 4	-85°, +265°	220°/s	-85°, +265°	180°/s	-85°, +265°	180°/s	-85°, +265°	180°/s	-85°, +265°	180°/s
	Joint 5	±360°	220°/s	±360°	180°/s	±360°	180°/s	±360°	180°/s	±360°	180°/s
	Joint 6	±360°	220°/s	±360°	180°/s	±360°	180°/s	±360°	180°/s	±360°	180°/s
	Maximum speed of the tool end	/	1.5m/s	/	3m/s	/	2.5m/s	/	3m/s	/	3.5m/s
Specifications	Power consumption	150W		350W		350W		500W		600W	
	IP classification	IP54		IP54		IP54		IP54		IP54	
	Tool I/O ports	Digital input 2		Digital input 2		Digital input 2		Digital input 2		Digital input 2	
		Digital output 2		Digital output 2		Digital output 2		Digital output 2		Digital output 2	
		Analog input 1		Analog input 1		Analog input 1		Analog input 1		Analog input 1	
Base diameter	129mm		158mm		158mm		188mm		188mm		
Electrical cabinet	IP classification	IP44		IP44		IP44		IP44		IP44	
	I/O ports	16 digital inputs, 16 digital outputs, 2 analog inputs or outputs		16 digital inputs, 16 digital outputs, 2 analog inputs or outputs		16 digital inputs, 16 digital outputs, 2 analog inputs or outputs		16 digital inputs, 16 digital outputs, 2 analog inputs or outputs		16 digital inputs, 16 digital outputs, 2 analog inputs or outputs	
	Communication	TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP	
	Power	100-240VAC, 50-60Hz		100-240VAC, 50-60Hz		100-240VAC, 50-60Hz		100-240VAC, 50-60Hz		100-240VAC, 50-60Hz	
	Size	410×307×235 (mm) (W×H×D)		410×307×235 (mm) (W×H×D)		410×307×235 (mm) (W×H×D)		410×307×235 (mm) (W×H×D)		410×307×235 (mm) (W×H×D)	
	Weight	13.5kg		15.4kg		15.4kg		18kg		18kg	

JAKA Zu s Collaborative Robots




Interactivity

Integrated force sensor
Integrated force control




Ease of Use

Simple force control configuration
Real-time force value display




Adjustability

Various force control modes
Option to install force sensor



Safety

Full-arm collision detection
Self-learning monitoring

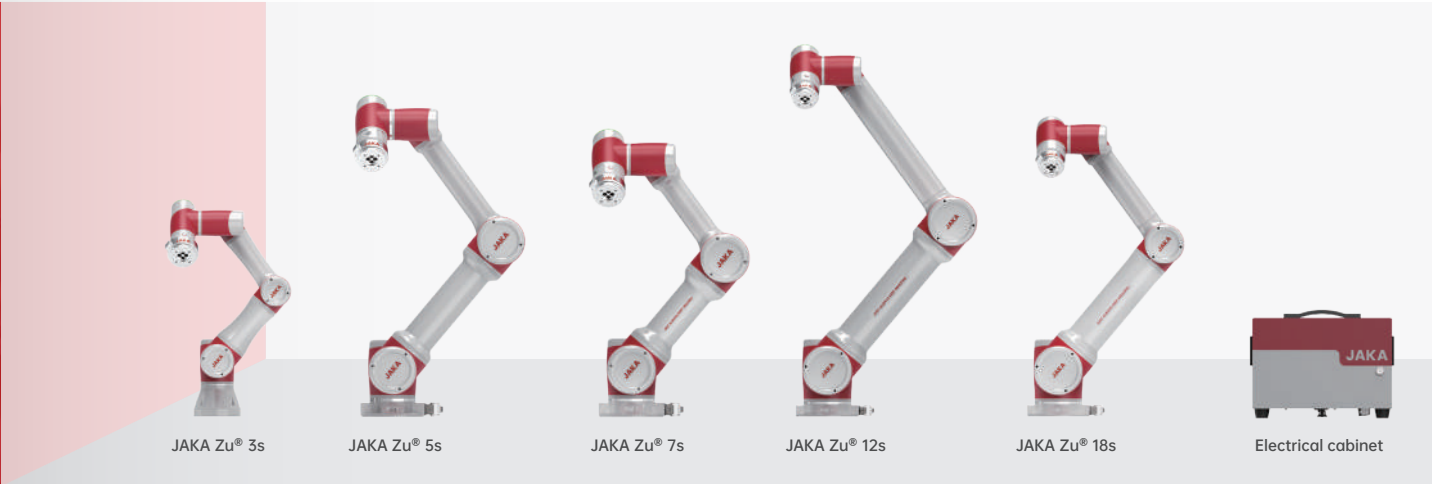

Product features	Product parameters		JAKA Zu® 3s		JAKA Zu® 5s		JAKA Zu® 7s		JAKA Zu® 12s		JAKA Zu® 18s		
	Maximum payload		3kg		5kg		7kg		12kg		18kg		
	Weight		12kg		23kg		22kg		41kg		35kg		
	Working radius		626mm		954mm		819mm		1327mm		1073mm		
	Repeatability		±0.02mm		±0.02mm		±0.02mm		±0.03mm		±0.03mm		
	Number of axis		6		6		6		6		6		
	Programming		Drag teaching and graphic programming		Drag teaching and graphic programming		Drag teaching and graphic programming		Drag teaching and graphic programming		Drag teaching and graphic programming		
Teaching pendant		PC, mobile (PAD/mobile)		PC, mobile (PAD/mobile)		PC, mobile (PAD/mobile)		PC, mobile (PAD/mobile)		PC, mobile (PAD/mobile)			
Working range and speed	Robot joint		Working range	Maximum speed	Working range	Maximum speed	Working range	Maximum speed	Working range	Maximum speed	Working range	Maximum speed	
	Joint 1		±360°	180°/s	±360°	180°/s	±360°	180°/s	±360°	120°/s	±360°	120°/s	
	Joint 2		-85°, +265°	180°/s	-85°, +265°	180°/s	-85°, +265°	180°/s	-85°, +265°	120°/s	-85°, +265°	120°/s	
	Joint 3		±175°	180°/s	±175°	180°/s	±175°	180°/s	±175°	120°/s	±175°	180°/s	
	Joint 4		-85°, +265°	220°/s	-85°, +265°	180°/s	-85°, +265°	180°/s	-85°, +265°	180°/s	-85°, +265°	180°/s	
	Joint 5		±360°	220°/s	±360°	180°/s	±360°	180°/s	±360°	180°/s	±360°	180°/s	
	Joint 6		±360°	220°/s	±360°	180°/s	±360°	180°/s	±360°	180°/s	±360°	180°/s	
Maximum speed of the tool end		/	1.5m/s	/	3m/s	/	2.5m/s	/	3m/s	/	3.5m/s		
Specifications	Power consumption		150W		350W		350W		500W		600W		
	IP classification		IP54		IP54		IP54		IP54		IP54		
	Tool I/O ports		2 digital input, 2 digital output, 1 analog output		2 digital input, 2 digital output, 1 analog output		2 digital input, 2 digital output, 1 analog output		2 digital input, 2 digital output, 1 analog output		2 digital input, 2 digital output, 1 analog output		
	Base diameter		129mm		158mm		158mm		188mm		188mm		
Force sensor parametelrs	End tool	Range (Fx/Fy)	100N/250N	200N/400N	100N/250N	200N/400N	100N/250N	200N/400N	250N	400N	250N	400N	
		Interface type	Ethernet interface	Serial port	Ethernet interface	Serial port	Ethernet interface	Serial port	Ethernet interface	Serial port	Ethernet interface	Serial port	
		Protection class		IP64		IP64		IP64		IP64		IP64	
	Base	Range (Fx/Fy)	500N		1600N		1600N		4000N		4000N		
		Interface type		Ethernet interface		Ethernet interface		Ethernet interface		Ethernet interface		Ethernet interface	
		Voltage		24V		24V		24V		24V		24V	
		Protection class		IP64		IP64		IP64		IP64		IP64	
Electrical cabinet	IP classification		IP44		IP44		IP44		IP44		IP44		
	I/O ports		16 digital inputs, 16 digital outputs, 2 analog inputs or outputs		16 digital inputs, 16 digital outputs, 2 analog inputs or outputs		16 digital inputs, 16 digital outputs, 2 analog inputs or outputs		16 digital inputs, 16 digital outputs, 2 analog inputs or outputs		16 digital inputs, 16 digital outputs, 2 analog inputs or outputs		
	Communication		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP		
	Power		100-240VAC, 50-60Hz		100-240VAC, 50-60Hz		100-240VAC, 50-60Hz		100-240VAC, 50-60Hz		100-240VAC, 50-60Hz		
	Size		410×307×235 (mm) (W×H×D)		410×307×235 (mm) (W×H×D)		410×307×235 (mm) (W×H×D)		410×307×235 (mm) (W×H×D)		410×307×235 (mm) (W×H×D)		
	Weight		13.5kg		15.4kg		15.4kg		18kg		18kg		

JAKA All-in-one Collaborative Robots

Smart


Equipped with vision system
to recognize objects

Simple

Plug-and-play
Wireless connection

Small

Small footprint
Compact design

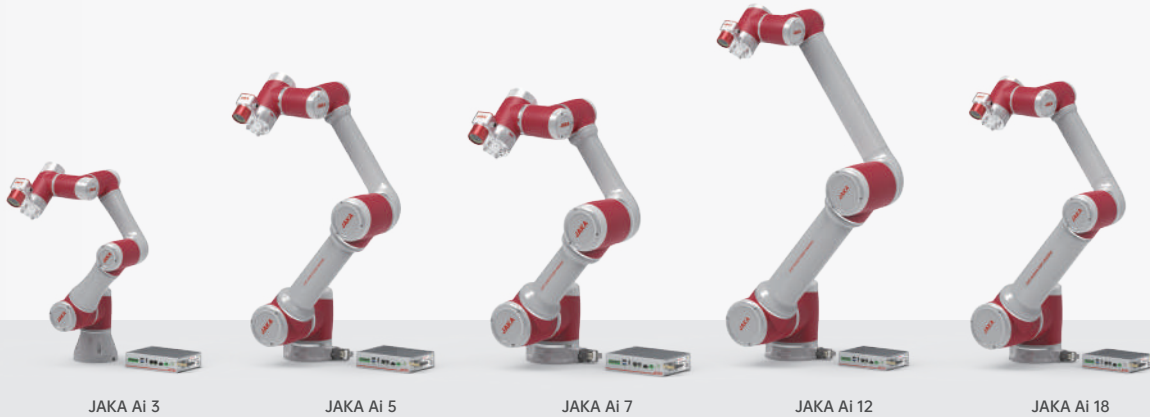

Product features	Product parameters		JAKA Ai 3		JAKA Ai 5		JAKA Ai 7		JAKA Ai 12		JAKA Ai 18	
	Maximum payload		3kg		5kg		7kg		12kg		18kg	
	Weight		12kg		23kg		22kg		41kg		35kg	
	Working radius		626mm		954mm		819mm		1327mm		1073mm	
	Repeatability		±0.02mm		±0.02mm		±0.02mm		±0.03mm		±0.03mm	
	Number of axis		6		6		6		6		6	
	Programming		Drag teaching and graphic programming		Drag teaching and graphic programming		Drag teaching and graphic programming		Drag teaching and graphic programming		Drag teaching and graphic programming	
Working range and speed	Teaching pendant		PC, mobile (PAD/mobile)		PC, mobile (PAD/mobile)		PC, mobile (PAD/mobile)		PC, mobile (PAD/mobile)		PC, mobile (PAD/mobile)	
	Robot joint		Working range		Maximum speed		Working range		Maximum speed		Working range	
	Joint 1		±360°		180°/s		±360°		180°/s		±360°	
	Joint 2		-85°, +265°		180°/s		-85°, +265°		180°/s		-85°, +265°	
	Joint 3		±175°		180°/s		±175°		180°/s		±175°	
	Joint 4		-85°, +265°		220°/s		-85°, +265°		180°/s		-85°, +265°	
	Joint 5		±360°		220°/s		±360°		180°/s		±360°	
Specifications	Joint 6		±360°		220°/s		±360°		180°/s		±360°	
	Maximum speed of the tool end		/		1.5m/s		/		3m/s		/	
	Power consumption		150W		350W		350W		500W		600W	
	IP classification		IP54		IP54		IP54		IP54		IP54	
	Tool I/O ports		2 digital input, 2 digital output, 1 analog output		2 digital input, 2 digital output, 1 analog output		2 digital input, 2 digital output, 1 analog output		2 digital input, 2 digital output, 1 analog output		2 digital input, 2 digital output, 1 analog output	
JAKA Lens 2D parameters	Base diameter		129mm		158mm		158mm		188mm		188mm	
	Lens focal length		8mm		16mm		8mm		16mm		8mm	
	Color mode		B&W/Color		B&W/Color		B&W/Color		B&W/Color		B&W/Color	
	Vision		>70mm*50mm		>35mm*25mm		>70mm*50mm		>35mm*25mm		>70mm*50mm	
	Precision		>0.08mm		>0.04mm		>0.08mm		>0.04mm		>0.08mm	
	Communications interface		Ethernet interface (TCP/IP protocol)		Ethernet interface (TCP/IP protocol)		Ethernet interface (TCP/IP protocol)		Ethernet interface (TCP/IP protocol)		Ethernet interface (TCP/IP protocol)	
	Resolution		2592(H) ×1944(V)		2592(H) ×1944(V)		2592(H) ×1944(V)		2592(H) ×1944(V)		2592(H) ×1944(V)	
MiniCab cabinet	Frame rate		24FPS		24FPS		24FPS		24FPS		24FPS	
	Input power		DC30-60V		DC30-60V		DC30-60V		DC30-60V		DC30-60V	
	Input current		≤40A		≤40A		≤40A		≤40A		≤40A	
	Size		180×28×47(mm)(L×W×H)		180×28×47(mm)(L×W×H)		180×28×47(mm)(L×W×H)		180×28×47(mm)(L×W×H)		180×28×47(mm)(L×W×H)	
	IP classification		IP20		IP20		IP20		IP20		IP20	
	I/O ports		7-way port; Input and output configurable		7-way port; Input and output configurable		7-way port; Input and output configurable		7-way port; Input and output configurable		7-way port; Input and output configurable	
	Communication		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP	
Weight	Weight		About 1.7 kg (including accessories)		About 1.7 kg (including accessories)		About 1.7 kg (including accessories)		About 1.7 kg (including accessories)		About 1.7 kg (including accessories)	

JAKA Pro Collaborative Robots

Reliable


Highest protection level of IP68
Dust, oil, and water-proof

Stable

Repeatability of ±0.02 mm
Work without supervision 24/7

Efficient

Fast to deploy
Easy to integrate and simple to re-program

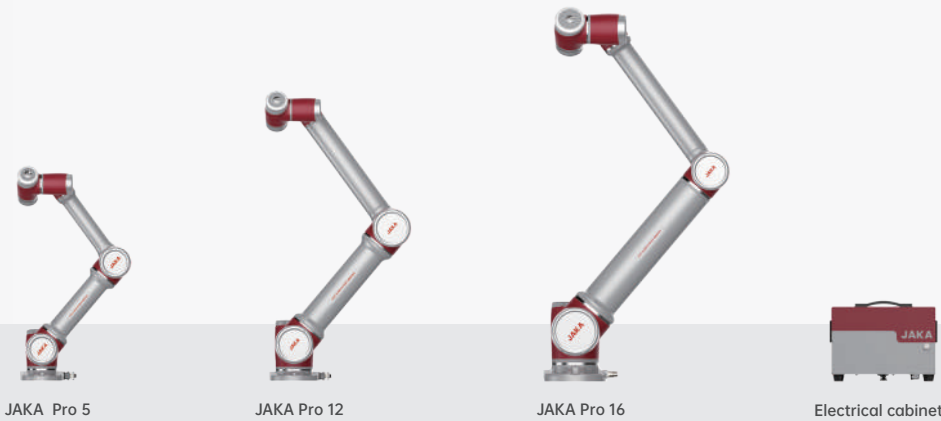

Product features	Product parameters		JAKA Pro 5		JAKA Pro 12		JAKA Pro 16	
	Maximum payload		5kg		12kg		16kg	
	Weight		23.5kg		41kg		74kg	
	Working radius		954mm		1327mm		1713mm	
	Repeatability		±0.02mm		±0.02mm		±0.02mm	
	Number of axis		6		6		6	
	Programming		Drag teaching and graphic programming		Drag teaching and graphic programming		Drag teaching and graphic programming	
	Teaching pendant		PC,Mobile device (PAD/mobile)		PC,Mobile device (PAD/mobile)		PC,Mobile device (PAD/mobile)	
Working range and speed	Robot joint		Working range	Maximum speed	Working range	Maximum speed	Working range	Maximum speed
	Joint 1		±360°	180°/s	±360°	120°/s	±360°	120°/s
	Joint 2		-85°, +265°	180°/s	-85°, +265°	120°/s	-85°, +265°	120°/s
	Joint 3		±175°	180°/s	±175°	120°/s	±175°	120°/s
	Joint 4		-85°, +265°	180°/s	-85°, +265°	180°/s	-85°, +265°	180°/s
	Joint 5		±360°	180°/s	±360°	180°/s	±360°	180°/s
	Joint 6		±360°	180°/s	±360°	180°/s	±360°	180°/s
	Maximum speed of the tool end		/	3m/s	/	3m/s	/	3.9m/s
Specifications	Power consumption		350W		500W		750W	
	IP classification		IP68		IP68		IP68	
	Tool I/O ports		Digital input 2		Digital input 2		Digital input 2	
			Digital output 2		Digital output 2		Digital output 2	
			Analog input 1		Analog input 1		Analog input 1	
	Base diameter		158mm		188mm		246mm	
Electrical cabinet	IP classification		IP44		IP44		IP44	
	I/O ports		16 digital inputs, 16 digital outputs, 2 analog inputs or outputs		16 digital inputs, 16 digital outputs, 2 analog inputs or outputs		16 digital inputs, 16 digital outputs, 2 analog inputs or outputs	
	Communication		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP		TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP	
	Power		100-240VAC, 50-60Hz		100-240VAC, 50-60Hz		100-240VAC, 50-60Hz	
	Size		410×307×235 (mm) (W×H×D)		410×307×235 (mm) (W×H×D)		410×307×235 (mm) (W×H×D)	
	Weight		15.4kg		18kg		18kg	

JAKA Lens 2D

JAKA Lens 2D

Product description

JAKA Lens 2D integrated camera adopts 2D high-resolution industrial camera, and is equipped with a special light source module and optional camera lens to provide users with comprehensive functions and experience of 2D vision. After professional industrial design, it is small and lightweight, and has a delicate appearance. It can realize 2D vision function by external fixed installation or by installing it at the end of the robot.



Flexible and convenient

Optional lens installation
Flexible adaptation to various scenarios

Customizable

Drag teaching and graphic programming
Various functions are available

High integration

Software and hardware integration
Easy and fast deployment

Product Features

Integrated design

A 2D camera that integrates three major modules of camera, lens, and light source. An integrated robot control cabinet that integrates a vision system and access it through a web.

Easy operation

The control cabinet is embedded with intelligent vision algorithms, process-guided project editing, one-button automatic hand-eye calibration, and flexible communication interfaces to adapt to the robot body.

Scenario-adaptable

Supports hardware parameter selection of multiple models, supports third-party brand camera extensions, supports custom external light sources, and is suitable for as many application scenarios as possible.

Visual parameters

Lens 2D parameters	Lens 2D CGC500-F08	Lens 2D CGC500-F16
Resolution	2592×1944	2592×1944
Max frame rate	24fps	24fps
Data interface	Gige	Gige
Color mode	Black and white / color	Black and white / color
Lens focal length	8mm	16mm
Object distance	>100mm	>100mm
Vision	>70×50mm	>35×25mm
Precision	>0.08mm	>0.04mm
Image processing	Soft-trigger image acquisition, single frame processing time within 1s	Soft-trigger image acquisition, single frame processing time within 1s

JAKA Lens VPS

Product description

JAKA Lens VPS 2.0 is developed based on high-performance AI-SoC chip, equipped with high-speed and large-capacity memory and storage space, and embedded with high-performance acceleration engine, which can realize target detection, object recognition, human pose feature point extraction, behavior understanding, and target state AI functions such as detection. The camera is placed on the top of the cobot working area, and the camera can monitor the behavioral norms or intrusions of the inspected objects (people and objects) in real time based on deep learning to ensure the safety of robots and people. The camera has a Gigabit Ethernet port, which supports industrial data extraction and video visualization processing, as well as video recording during alarm periods.

High reliability

Isolate external factors
The protection effect is stable and reliable

High performance

High speed combined with
high storage capacity

High convenience

No complicated software installation required
Browse the web for easy access



Product Features



Built-in neural network accelerator for AI recognition and analysis of video




Event recording function, which can record key video segments, eliminate redundant information, trace back, and analyze more conveniently



Plug and play, no need to install software, access settings via browser



It can perform AI detection functions such as helmet wearing, personnel target tracking, personnel labor intensity, and video scoring calculation

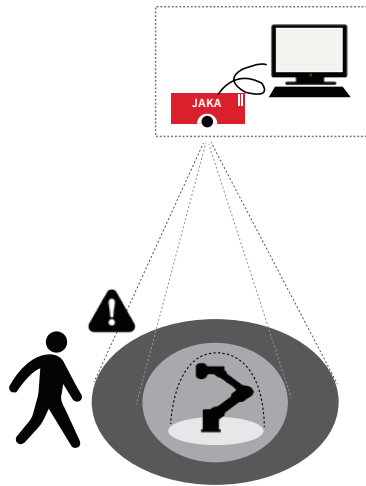

Visual protection system working diagram

Basic parameters

Hardware platform	CMOS camera, embedded system, DSP, AI engine, etc.
Dimensions	101.7mm×72mm×51.1mm
Installation method	Directly above, sideways (any angle)
Communication interface	Ethernet interface, RS485, PNP optocoupler isolation DI and DO

Visual parameters


Resolving power	830 w pixels
Response time	200 ms
Installation height	2.5 mm (suggested)
Communication interface	5 m*2.6 m (adjustable)

JAKA MiniCobo


Product introduction

The JAKA MiniCobo adopts an intelligent control and drive control module, which has both lightweight design and superior product performance. At the same time, the rich secondary development interface creates infinite possibilities for the development of more scenarios.


The JAKA MiniCobo has a small and rounded appearance, simple and intuitive operation, produces almost no noise and features good performance. The cobot is highly recommended for education, retail, entertainment and other B2C industries.



Ideal for B2C



Cost-effective



Lightweight



Weight

9.4kg



Payload

1.0kg



Working radius

580mm



Repeatability

±0.1mm

Application case



Product features	Product model	MiniCobo	
	Payload	1kg	
	Weight(W cable)	9.4kg	
	Work radius	580mm	
	Repeatability	±0.1mm	
	Axis	6 axes	
	Programming	Graphical programming, free-drive	
	Teach pendant	MT (PAD/Mobile) APP	
	Collaborative operation	Accordance with GB 11291.1-2011	
Working range and speed	Robot joint	Working range	Maximum speed
	Joint1	±360°	180°/s
	Joint2	±120°	180°/s
	Joint3	±150°	180°/s
	Joint4	±360°	180°/s
	Joint5	±120°	180°/s
	Joint6	±360°	180°/s
	Maximum speed of the tool end	/	1.5m/s
Physical properties and others	Rated power	150W	
	Temperature range	0-50℃	
	IP Specification	IP40	
	Installation	Installation at any angle	
	Tool I/O	Digital input 2	
		Digital output 2	
		Analog input 1	
	Tool I/O power	24DC	
	Tool I/O size	M8	
	Materials	Aluminum, PC	
	Base diameter	124mm	
	Cable length	6m	
Electrical cabinet	Device	20-60VDC	
	Iout	≤40A	
	Size	180×128×47(mm)(L×W×H)	
	IP Level	IP20	
	I/O	7 Digital input: I/O configurable	
	I/O Power	24VDC	
	Fixed Form	Panel/Guide Rail	
	Interface	TCP/IP, Modbus TCP, Modbus RTU, Profinet, Ethernet/IP	
	Weight	1.1kg	
	Material	AL, Steel	